





LUMI-LINK™

LUX Superbright Strip Light - SL180 (IP68)

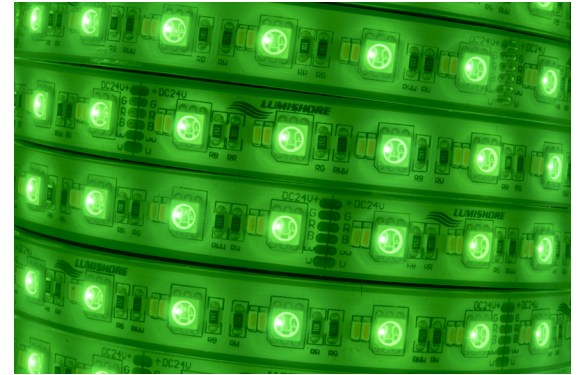

PART DESCRIPTION		LUX SUPERBRIGHT STRIP LIGHT - 180 LED PER METER - IP68
Part Number	60-0379	
Available colors	Full Spectrum RGB and White Color Temperature Tunable (2700K to 6500K) in the same LED strip	
LED type	Warm White, Cold White, Red, Green and Blue (5 Channel)	
LED Density	180 LEDs per meter	
Warranty	2 years	
Compatible Drivers	Lux Strip Light Driver (see accessories)	
Customer Control Options	Lumi-Link Command Center Customer Supplied Momentary Switch	
Electrical Installation	Plug and Play	

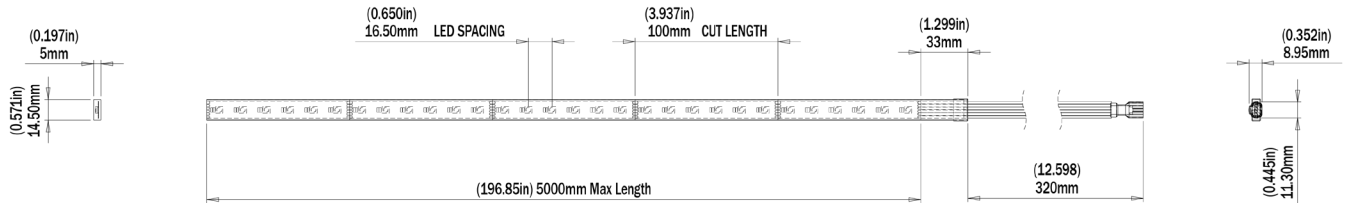

SUGGESTED MOUNTING BRACKET SPACING



EMEA: Info@Lumishore.com | USA: Sales@LumishoreUSA.com

Units 11 & 12, Ashmount Business Park, Upper Fforest Way, Swansea, SA6 8QR | 7137 24th Court East, Sarasota, FL 34243, USA

LUX Superbright Strip Light - SL180 (IP68)



TECHNICAL

Compatible Drivers	Lux Strip Light Driver (see accessories)
Number of LED strips per Driver	Multiple - up to 10m (32.8') total

PHYSICAL

Ingress Protection	IP68
Cross Section	14.5mm x 5mm (0.57" x 0.2")
Lengths Available	0.3m, 0.6m, 1m, 2.5m and 5m 1ft, 2ft, 3.3ft, 8.2ft and 16.4ft* (not including cables)
Construction	Fully Encapsulated and Potted
Mechanical Installation	Adhesive Backing and Screw Clips
Weight - g/m (oz/ft)	95 g/m (1 oz/ft)
UV Resistant	Yes
Salt Spray Tested	Yes
Installation Location	Outdoor / Partially Covered Areas/ Indoor For above water applications only

* Custom Lengths available for OEMs

ACCESSORIES

Accessory	Part number
Lumi-Link Command Center	60-0366
Lux Strip Light Driver - Voltage Stabilised (10.5 - 31V DC)	60-0383
Lux Strip Light Driver - Non-Stabilised (23-25 V DC)	60-0384
Strip light extension cable - 1m	60-0385
Strip light extension cable - 2m	60-0386
Strip light extension cable - 3m	60-0387
Strip light extension cable - 4m	60-0388
Strip light extension cable - 5m	60-0389
6-core cable splitter - 2 way	60-0438
6-core cable splitter - 3 way	60-0439
Stainless Steel Clips (Bag of 25)	60-0409