


# APELO

## Light Controller

Quick Start Guide  
Schnellstart-Anleitung  
Guide de démarrage rapide  
Guía de inicio rápido

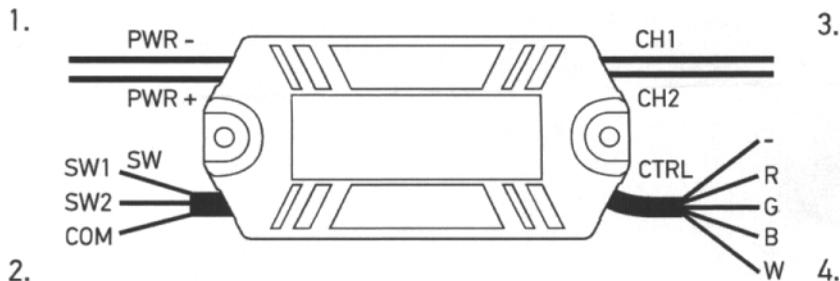

Please review the full wiring instructions before use.

Function	Max	Terminal on Backplate	Wire Color	
1.	Power Supply +VE	13A	PWR +	Red (+)
	Power Supply -VE	N/A	PWR -	Black (-)
2.	Switch Function 1	N/A	SW	Blue (+)
	Switch Function 2	N/A	SW	Brown (+)
	Switch Common	N/A	SW	Black (-)
3.	Light Supply 1	13A*	CH1	Red (+)
	Light Supply 2		CH2	Red (+)
4.	Lamp Return	N/A	CTRL	Black (-)
	Red Color Control	3A	CTRL	Red (-)
	Green Color Control	3A	CTRL	Green (-)
	Blue Color Control	3A	CTRL	Blue (-)
	White Color Control	3A	CTRL	Brown (-)

\* Momentary 13A, sustained 12A, @25°C ambient. CH1 and CH2 combined.  
Use CH1 to connect Hella Dual Color lamps. Use CH2 to connect Hella RGB/W lamps.

Do not use for safety functions & do not use for inductive loads.



Full wiring instructions  
Vollständige Verdrahtungsanleitung  
Instructions de câblage complètes  
Instrucciones completas de cableado

[www.hellamarine.com/blog/document/apelo-light-controller-instructions/](http://www.hellamarine.com/blog/document/apelo-light-controller-instructions/)



Apelo App  
compatible.

**Hella marine**

[www.hellamarine.com](http://www.hellamarine.com)

For more information contact  
[www.hellamarine.com/contact/](http://www.hellamarine.com/contact/)